



Corrigendum to “Filtration efficiency and ventilation performance of window screen filters” [Build. Environ. 178 (2020) 106878]



Kyungmo Kang^{a,b}, Taeyeon Kim^a, Cheol Woong Shin^c, Kichul Kim^b, Jiwoong Kim^b, Yun Gyu Lee^{b,*}

^a Department of Architecture and Architectural Engineering, Yonsei University, 50 Yonsei-ro, Seodaemun-gu, Seoul, Republic of Korea

^b Department of Living and Built Environment Research, Korea Institute of Construction Technology, 283 Goyang-daero, Ilsanseo-gu, Goyang-si, Republic of Korea

^c Energy & Environment Business Division, KCL (Korea Conformity Laboratories), 7 Jeongtong-ro, Deoksan-myeon, Jincheon-gun, Chungcheongbuk-do, Republic of Korea

The authors regret


In the manuscript page 2,

The nanofiber-layered window screen filter contains layers with openings of approximately 500 nm, which are finer from those of nanofiber filters used in previous studies [35–37,41,42]. (Origin

The authors would like to apologise for any inconvenience caused.

In the manuscript page 3, Table 1

Add the figures (SEM images)

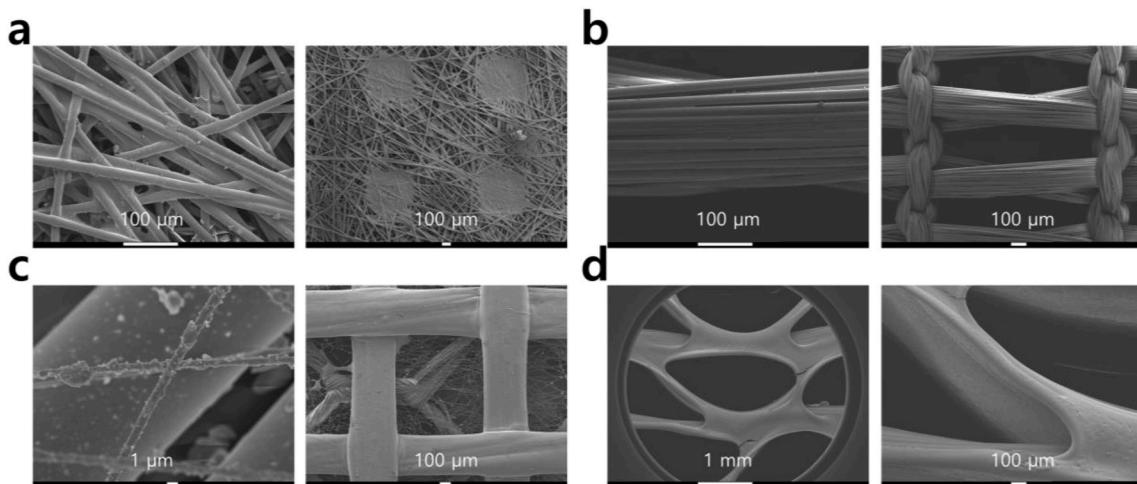

manuscript)

The nanofiber-layered window screen filter contains layers with openings of approximately 500 nm, which are **not** finer from those of nanofiber filters used in previous studies [35–37,41,42]. (Revised manuscript)

In the Supplementary Materials page 1, Table S1

The upstream and downstream concentrations ($\mu\text{g}/\text{m}^3$) by particle size (μm). (Origin manuscript)

The upstream and downstream concentrations ($/\text{m}^3$) by particle size (μm). (Revised manuscript)

DOI of original article: <https://doi.org/10.1016/j.buildenv.2020.106878>.

* Corresponding author.

E-mail addresses: kyungmokang@kict.re.kr (K. Kang), tkim@yonsei.ac.kr (T. Kim), scu1102@kcl.re.kr (C.W. Shin), kichulkim@kict.re.kr (K. Kim), kimjiwoong@kict.re.kr (J. Kim), yglee@kict.re.kr (Y.G. Lee).

<https://doi.org/10.1016/j.buildenv.2021.107612>

Available online 21 January 2021

0360-1323/© 2020 Elsevier Ltd. All rights reserved.